




Rugby Posts

SIZE 9' 6" Wide x 12' high, Crossbar 6' 6" high

COMPONENT CHECKLIST AND ASSEMBLY INSTRUCTIONS

COMPONENT	No	Qty
	1	2
	2	7
	3	2
	4	6
	5	2
	6	2
	7	2
BAG	8	1

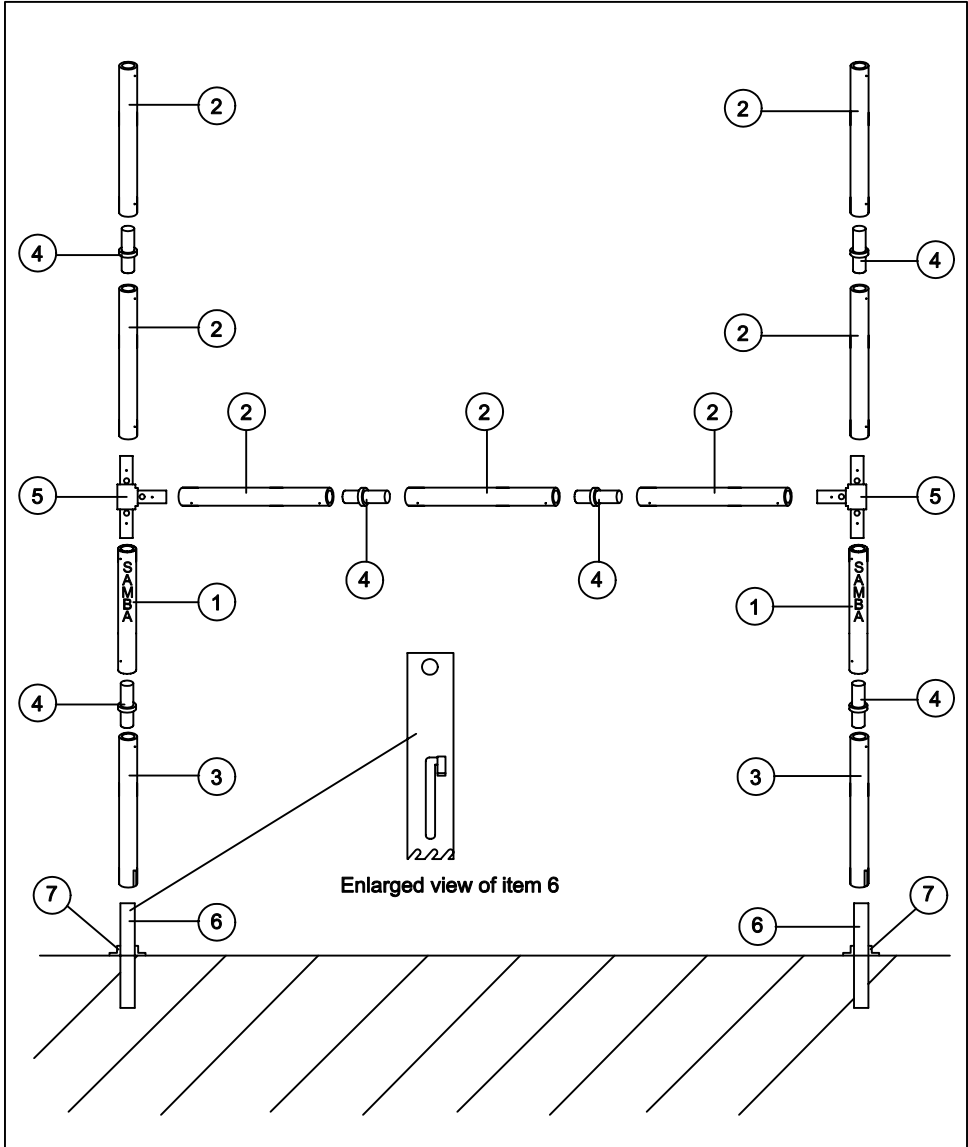

NO DAMAGE TO PITCH WITH THIS UNIQUE REVOLUTIONARY POST SUPPORT SYSTEM

The NO-HOLE post support is designed to be simple and efficient in use. Its unique feature is that if removed according to the instructions, it will leave no hole where it has been.

INSERTION:

1. Insert the handle into the NO-HOLE, pull plunger to top of slot and rest in hole provided.
2. Place base of NO-HOLE in correct position and with downward pressure screw into the ground to desired depth (usually 6-8 inches).
3. In the event of hard or stoney ground a mallet can be used if desired. A block or similar, is recommended to protect the top.

REMOVAL:

1. Place one foot on each of the protruding plunger stabilisers, insert the metal handle into the top of the NO-HOLE and pull NO-HOLE out of the ground. MAKE SURE THE BODY WEIGHT IS FIRMLY ON THE PLUNGER STABILISERS (This will ensure the plunger leaves the earth core in the ground.)
2. Please note that if the NO-HOLE is reluctant to release the compacted earth core, remove from the ground with the core still inside, tap sides of NO-HOLE to loosen core and then return to the hole.
6. Repeat removal process for second NO-HOLE.

B.G. SPORTS INTERNATIONAL LIMITED - Walton Street - Colne - Lancashire BB8 0EN
Tel: 01282 860077 Fax: 01282 860033
Email : info@sambasports.co.uk Web site: www.sambasports.co.uk